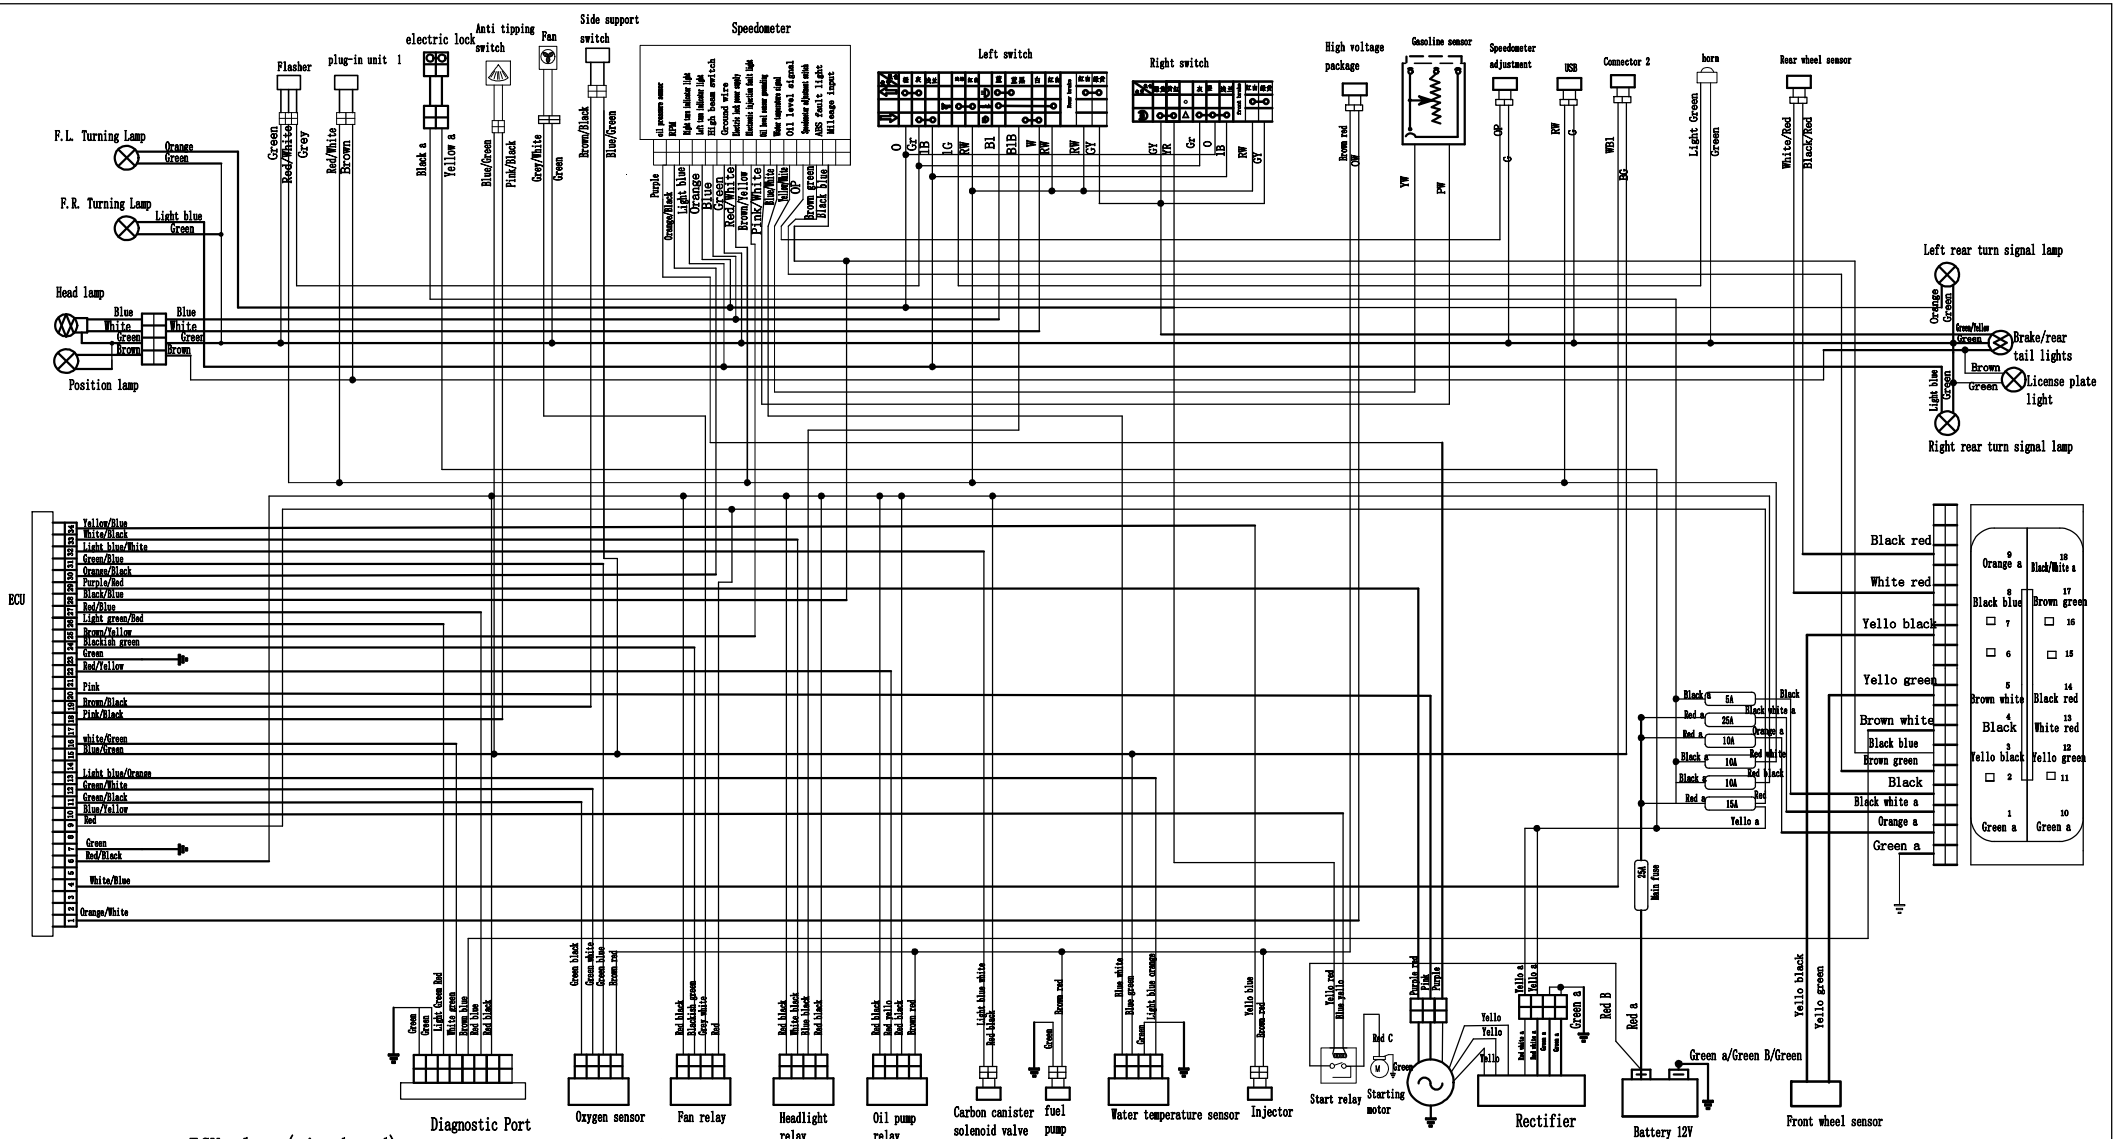
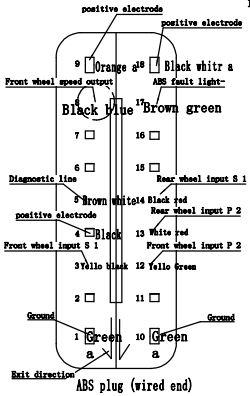




## ECU plug (wired end)

| | | | | | |
|---|---|---|---|---|---|
| 1 | Orange white | ignition control signal output | 18 | Pink/Black | Dump Switch |
| 2 | | | 19 | Brown black | side support switch signal |
| 3 | | | 20 | pink | trigger signal - |
| 4 | White blue | engine shutdown signal input | 21 | | |
| 5 | | | 22 | Red yellow | electronic injection relay control signal |
| 6 | red black | +12V power supply (electric lock) | 23 | Green | electronic injection system grounding |
| 7 | green | electronic injection system | 24 | dark green | fan relay control signal |
| 8 | | | 25 | Brown yellow | electronic spray malfunction alarm |
| 9 | red | +12V power supply (battery) | 26 | light blue black | CAN H Euro 5 |
| 10 | Blue yellow | start relay control signal | 27 | Red blue | CAN L Euro 5 |
| 11 | Green black | oxygen sensor signal+ | 28 | Black blue | vehicle speed input |
| 12 | green red white | oxygen sensor signal - | 29 | Purple red | trigger signal+ |
| 13 | light blue orange | water temperature signal input | 30 | Orange Black | Engine RPM |
| 14 | | | 31 | Green blue | oxygen sensor heating control signal |
| 15 | Blue Green | External Sensor Ground Signal - | 32 | Light blue white | carbon canister solenoid valve signal |
| 16 | white green | K-line, not required for Euro 5 | 33 | White black | headlight relay control signal |
| 17 | | | 34 | Yellow blue | fuel injector control signal |




ABS plug (wired end)

TYCO 1-2112780-7




Speedometer plug (Wireless side)

| | | | | | |
|---|---|---|---|---|---|
| 更改标记 | 更改单号 | 签 名 | 日期 | 名称 | 电气原理图 |
| 设 计 | 张业军 | 20230810 | | 型号 | GP300 |
| 校 | | | | 装配代号 | |
| 核 | | | | 材料 | |
| 标 | | | | 热处理 | |
| 定 | | | | 表面处理 | |
| | | | | 代号 | |
| | | | | 标记 S | 重量 ) 比例 |
| | | | | 共 1 页 | 第 1 页 第 I 版 |